


BRTP07ISS1PC technical specifications

Power sourse (Kva)	Power Supply (V)	Recommended IMM (T)	Drive method	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(kg)
1.27	220	60-200	Air cylinder drive/AC servo motor	/	125	750	224	2	5	1.4	single arm and single type	zero suctions zero fixtures	30°~90°	0.5-0.6	3	±0.05	1122*500*1577	50

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
/	/	/	/	/	/	/	/	φ25-125	400w	400w 1:5	15mm	Belt: 15mm	/	/	/	/	/	/

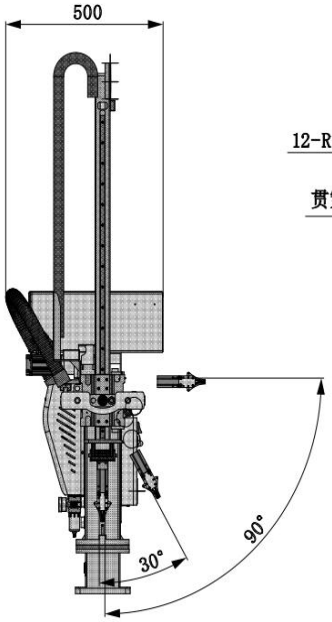



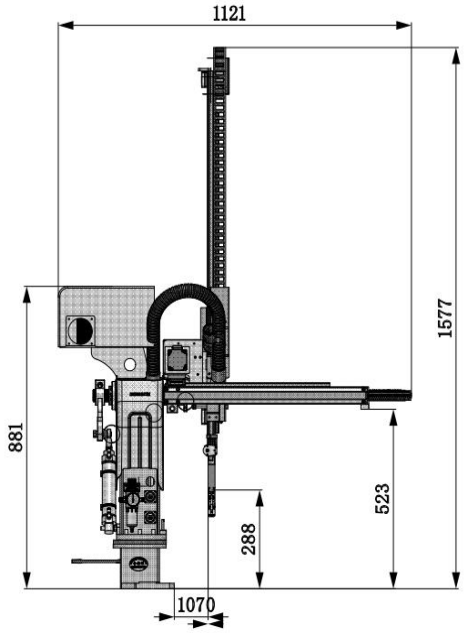

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.