
BRTNG11WSS3P technical specifications

Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
5.38	220	250-480	AC servo motor	1700	700	1100	185	2	4.42	0.87	Single arm and telescopic type	Two suctions two fixtures	90°	0.5-0.6	3.2	±0.05	2510*1199*1485	305

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000W	750W 1：5	25mm	gear： 25mm	750W	750W 1:5	25mm	gear: 20	/	1000W	750W 1：5	20mm 25mm	belt: 20mm gear：20mm	/	/	/	/	/	/

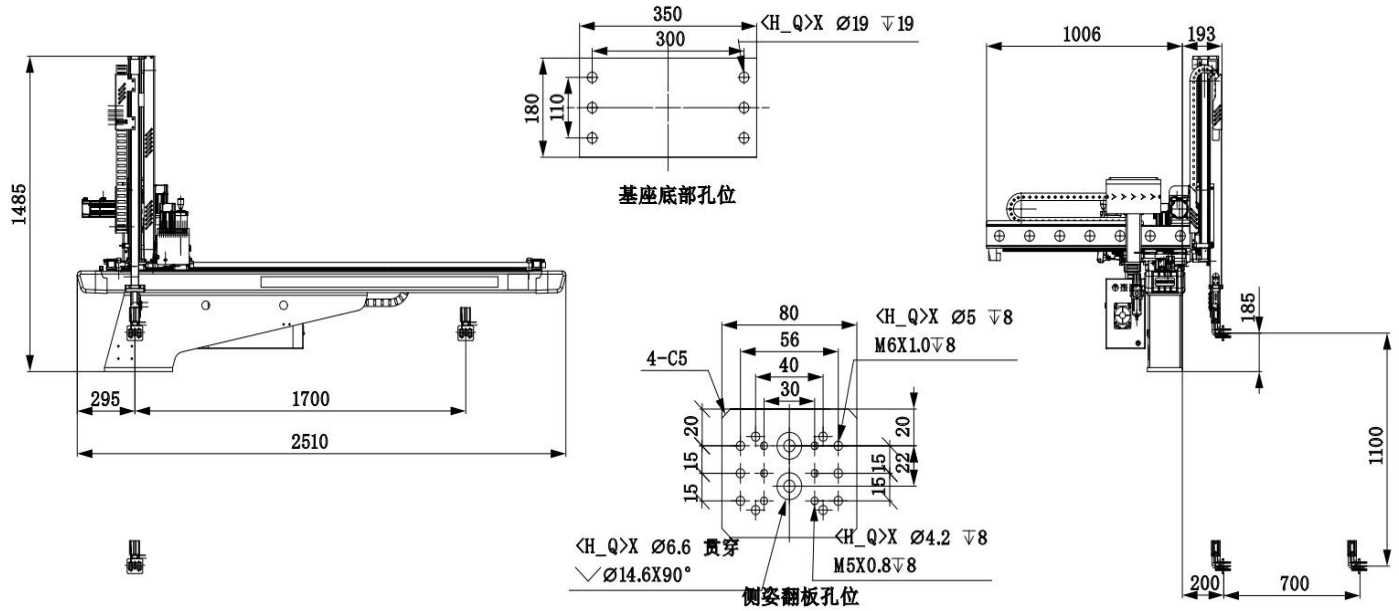

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.