
BRTV17WSS5PC technical specifications

Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Driving Method	Traverser Stroke (mm)	Crosswise Adjustment Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
4.23	220	600-1300	AC servo motor	Traverse total arch length: 12m	±200	1700	174.5	20	pending	5.21	Single arm and telescopic type	Four suctions two fixtures	C axis: 180° A axis: 360°	0.5-0.6	15	±0.05	12199*2992*2065	/

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000W	750W 1：9	30mm	Gear rack: 24mm	750W	750W 1:9	25mm	Gear rack: 24	/	1000W	750W 1：15	20mm 15mm	Belt: 20mm Gear: 20mm	32-900	/	/	/	/	/

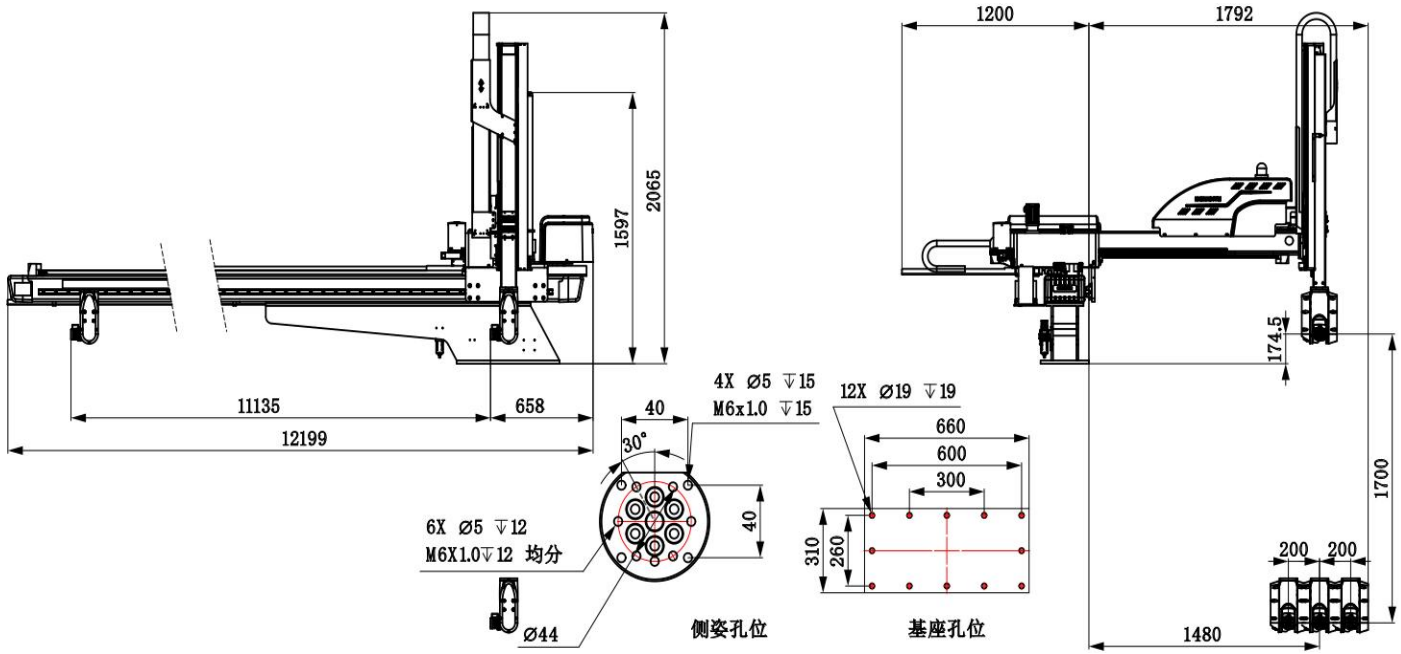

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.