
BRTR09WDS5P0 technical specifications

Power sourse (Kva)	Power Supply (V)	Recommended IMM (T)	Drive Method	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(kg)
2.91	220	160-320	AC servo motor	1500	P: 520 R: 520	950	P: 161.5 R: 194	8	5.61	1.5	Double arms and telescopic type	Four suctions two fixtures	90°	0.5-0.6	4	±0.05	2152*1476*1344	246

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
750W	750W 1：9	25mm	belt: 25mm	400W*2	400W*2 1:9	20mm	gear: 20*20	/	750W	750W 1：9	20mm 20mm	Belt: 15mm 25mm	/	750W	750W 1:5	20mm 20mm	belt: 15mm 25mm	/

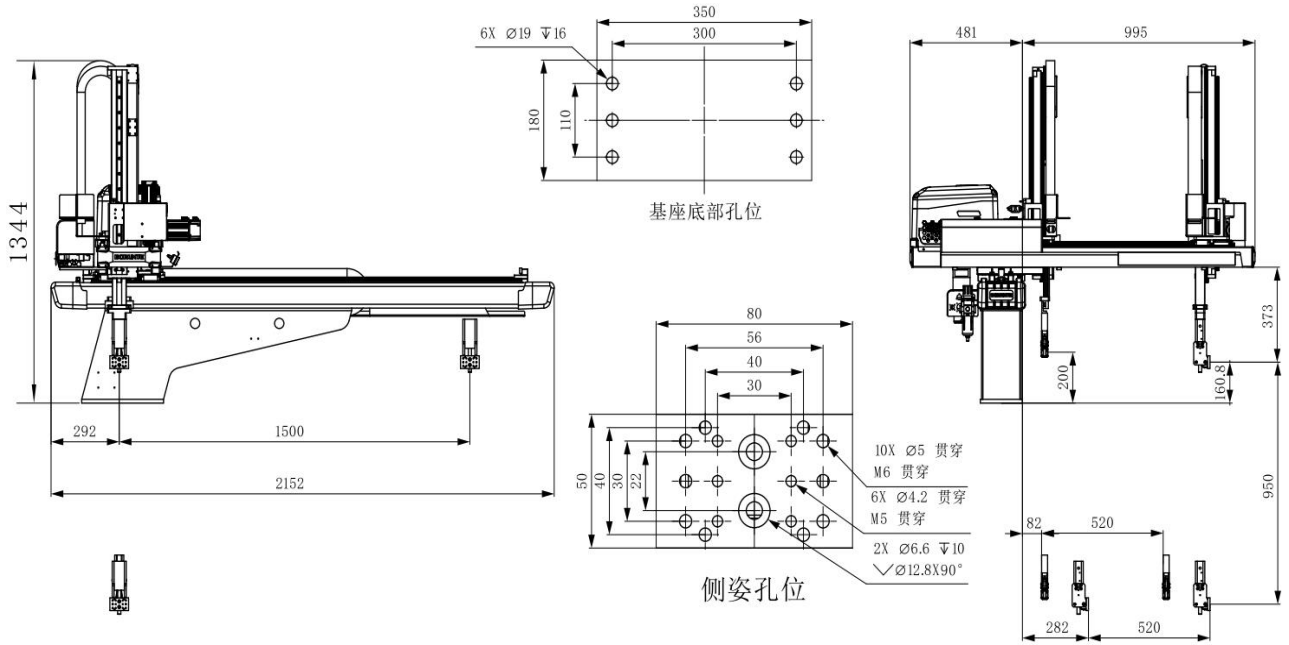

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.