
BRTNN15WSS3P 三轴伺服机械手 (32版本) 技术规格书

电源容量（KVA）	电源（V）	适应成型机（T）	驱动方式	横行行程（mm）	引拔行程（mm）	上下行程（mm）	待机位（mm）	最大载荷（Kg）	循环时间（s）	取物时间（s）	手臂型式	治具型式	姿态角度	工作气压（MPa）	空气消耗量（Nl/cycle）	精度定位（mm）	整机尺寸 长*宽*高（mm）	净重(Kg)
3.2	220	470-800	AC伺服马达	2260	900	1500	245	15	9.03	2.74	单臂双截	2吸2抱	90°	0.5-0.6	3	0.1	3273*1627*1814	500

横行部				引拔部					正臂部					副臂部				
横行部电机	横行部减速机	横行部滑轨	横行部齿条/皮带	引拔部电机	引拔部减速机	引拔部滑轨	引拔部齿条/皮带	引拔部气缸	正臂部电机	正臂减速机	正臂部滑轨	正臂部齿条/皮带	正臂部气缸	副臂部电机	副臂减速机	副臂部滑轨	副臂部齿条/皮带	副臂部气缸
1000w	750W 1：9	25mm	齿条24	750W	750W 1：5	20mm	齿条20	/	1000w	750W 1：9	15mm 15mm	皮带： 25mm 30mm	/	/	/	/	/	/

机型表示： W：双截式 S:单臂机械手（成品臂）S3：三轴AC伺服马达驱动（成品臂上下、引拔+横行）
Denote:W:Telescopic type. S:Product arm S3: Three-axis AC servo motor drive (finished arm vertical movement, pulling + horizontal movement)

上述取物时间，循环时间为我司内部测试标准测试结果，在机器实际应用过程中会因实际使用行程，负载，调试参数不同而有所变化.
The above-mentioned cycle time are the results of our internal test standard,In the actual application process of the machine,they will vary according to the actual operation ,loading and debugging parameters.

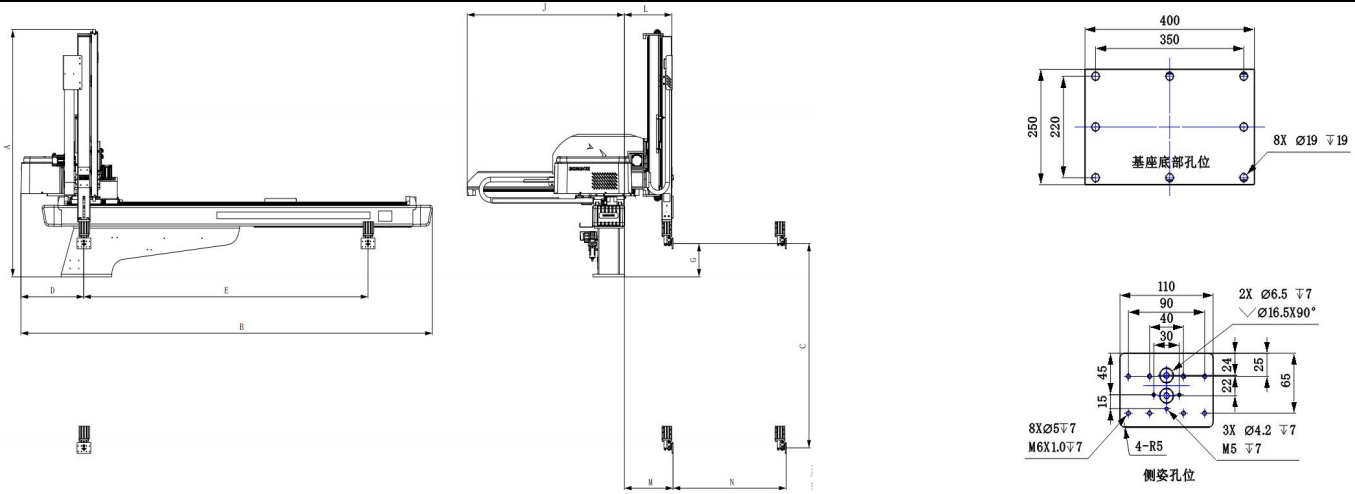

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
BRTNN15WSS3P	1814	3273	1500	501	2260	/	245	/	/	1249	/	378	387	900	/

机型特点 Product Features

BRTNN15WSS3P 系列适用于470-800T的各种塑胶射出成型机，三轴AC伺服驱动，可自由定位调整夹具角度，寿命长，精度高，故障率低，维护简单，主要用于快速取出或是复杂角度取出，特别是长形状产品如汽车品，洗衣机家电用品。

三轴轴驱控一体控制系统：信号线少，远距离通讯，扩展性能好，抗干扰能力强，重复定位精度高，设备维护简单，故障率少。

The BRTNN15WSS3P series is suitable for various plastic injection molding machines with capacities ranging from 470 to 800T. It features three-axis AC servo drives, allowing free positioning and adjustment of the fixture angle. With long lifespan, high precision, low failure rate, and simple maintenance, it is primarily used for rapid extraction or complex-angle extraction, particularly for long-shaped products such as automotive parts, washing machines, and household appliances.

Three-axis integrated drive and control system: features fewer signal lines, long-distance communication, excellent expandability, strong anti-interference capability, high repeat positioning accuracy, simple equipment maintenance, and low failure rate.

因改良等原因，规格及外观有所变更时，不再另行通知，敬请见谅。
Without further notice if specification and exterior have been changed because of improvement.Thanks for your understanding.