

BRTM09IDS5PC technical specifications


Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
3.1	220	160-320	AC servo motor	1500	P:650 R:650	900	P:152.5 R:189	10	7.6	2.74	Double arms and Single type	Two suctions four fixtures	90°	0.5-0.6	4	±0.05	2275*1695*7856	310

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
750W	750W 1：9	25mm	belt：25mm	400W*2	400W*2 1:9	20mm	Belt: 20	/	750W	750W 1：9	15mm 15mm	belt: 25mm	/	750W	750W 1:5	20mm	Belt: 25mm	/

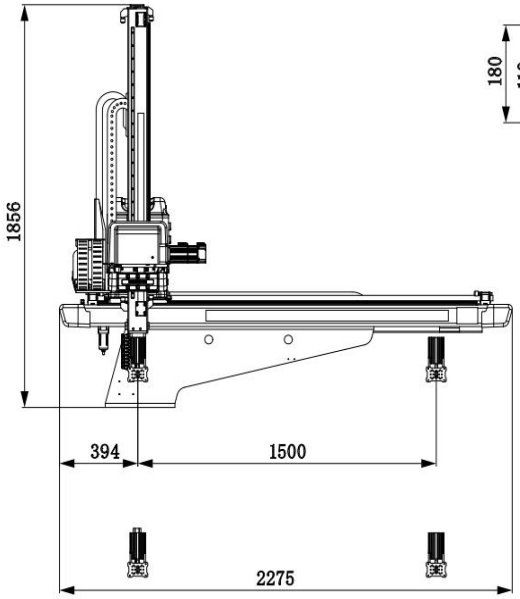


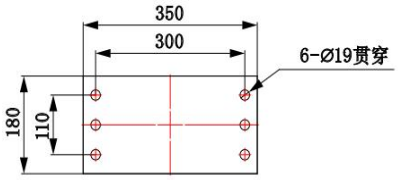

基座底部孔位



侧姿翻版孔位

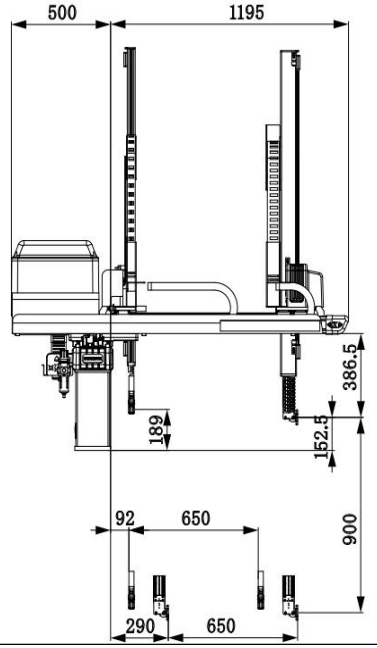

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.