

（31 version） BRTN17WSS5PC technical specifications


Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Drive Method	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
4.23	220	600-1700	AC servo motor	2510	1415	1700	155.5	20	13.32	4.45	Single arm and telescopic type	Four suctions two fixtures	C axis: 180° A axis: 360°	0.5-0.6	15	±0.1	3512*2258*1906	585

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000W	750W 1：9	30mm	gear：24	750W	750W 1:5	25mm	gear: 20	/	1000W	750W 1：15	20mm 15mm	belt: 20 gear：30	32-900	/	/	/	/	/

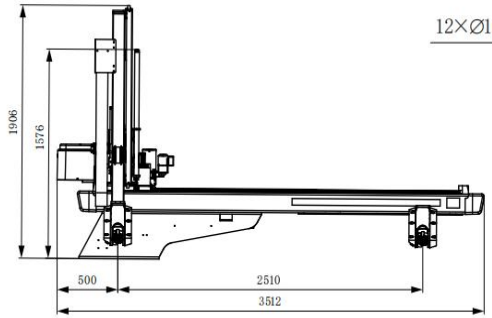


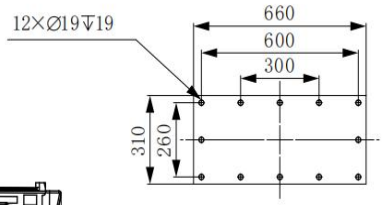

基座孔位

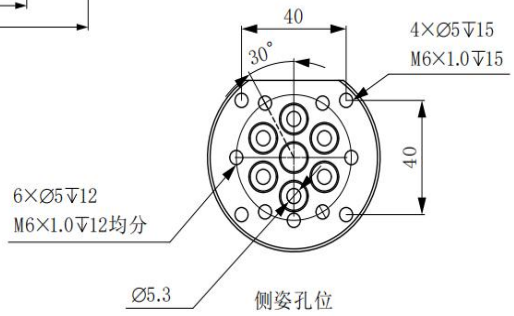

侧姿孔位

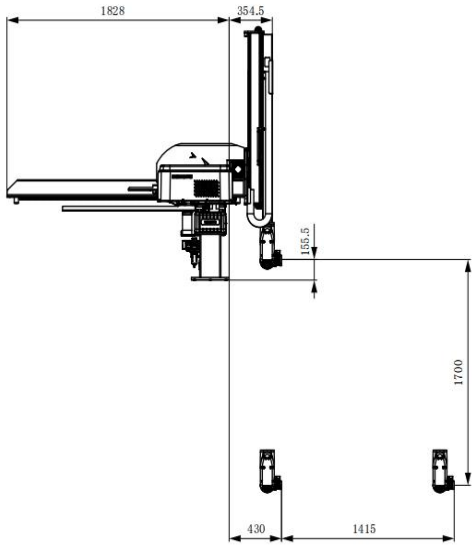

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.