
BRTNG09WSS3P technical specifications

Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
3.23	220	160-380	AC servo motor	1500	600	950	219	2	4.07	0.68	Single arm and telescopic type	two suctions two fixtures	90°	0.5-0.6	3.2	±0.05	2275.5*1152.5*1362	300

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000W	750W 1：5	25mm	gear：20	750W	750W 1:5	20mm	gear: 20	/	1000W	750W 1：5	15mm 20mm	belt: 20mm gear：20mm	/	/	/	/	/	/

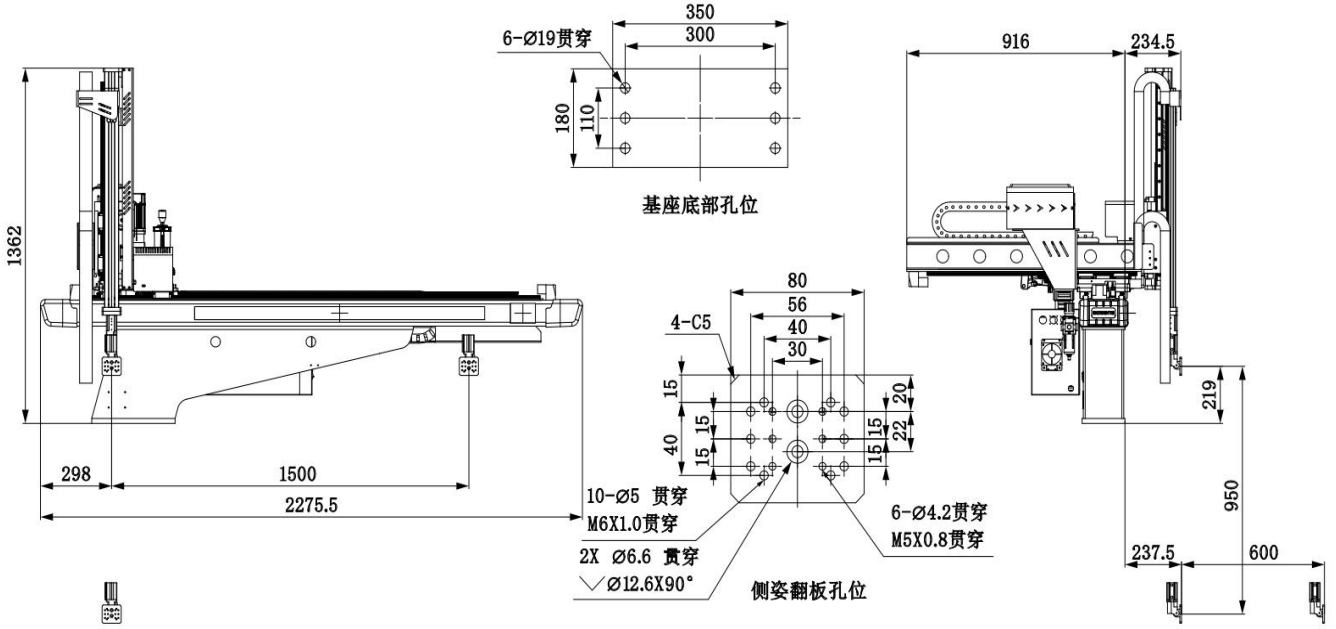

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.