
BRTR07WDS5PC technical specifications

Power sourse (Kva)	Power Supply (V)	Recommended IMM (T)	Drive Method	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(kg)
3.32	220	50-200	AC servo motor	1300	P: 370 R: 370	750	P: 200 R: 240	3	4.95	1.32	Double arms and telescopic type	Four suctions two fixtures	90°	0.5-0.6	4	±0.05	1962.5*1326*1245	230

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
750W	750W 1：9	25mm	belt: 25mm	400W*2	400W*2 1:9	20mm	gear: 20mm	/	750W	750W 1：5	20 20	belt: 15mm 25mm	/	750W	750W 1:5	20 20	belt: 25mm 15mm	/

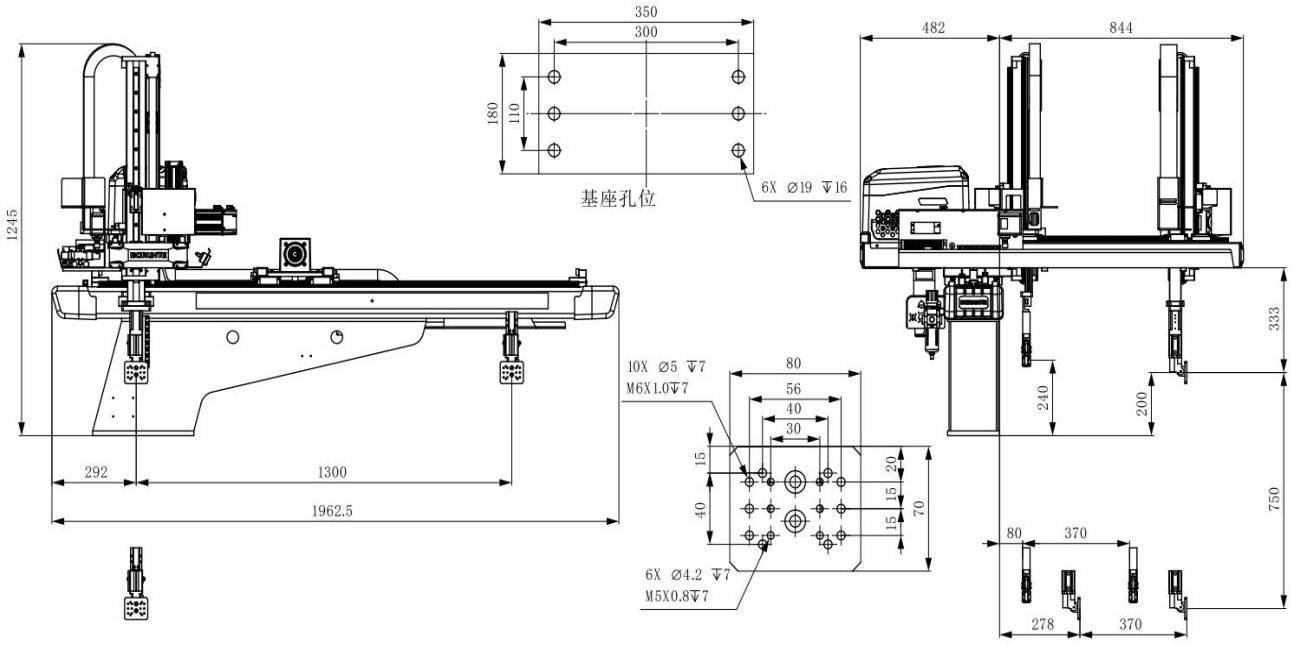

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.