
BRTR08TDS5PC technical specifications

Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
3.57	220	50-230	AC servo motor	1300	P: 430 R: 430	810	P: 85 R: 92	3	4.55	0.92	Double arms and ternary type	Two suctions two fixtures	90°	0.5-0.6	4	±0.05	2279*1367*910	295

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
750W	750W 1：9	25mm	belt: 20mm	400W*2	400W*2 1:9	20mm	gear: 20mm	/	750W	750W 1：9	20mm 20mm 20mm	Belt: 20mm 15mm	/	750W	750W 1:9	20mm 20mm 20mm	belt: 20mm 15mm	/

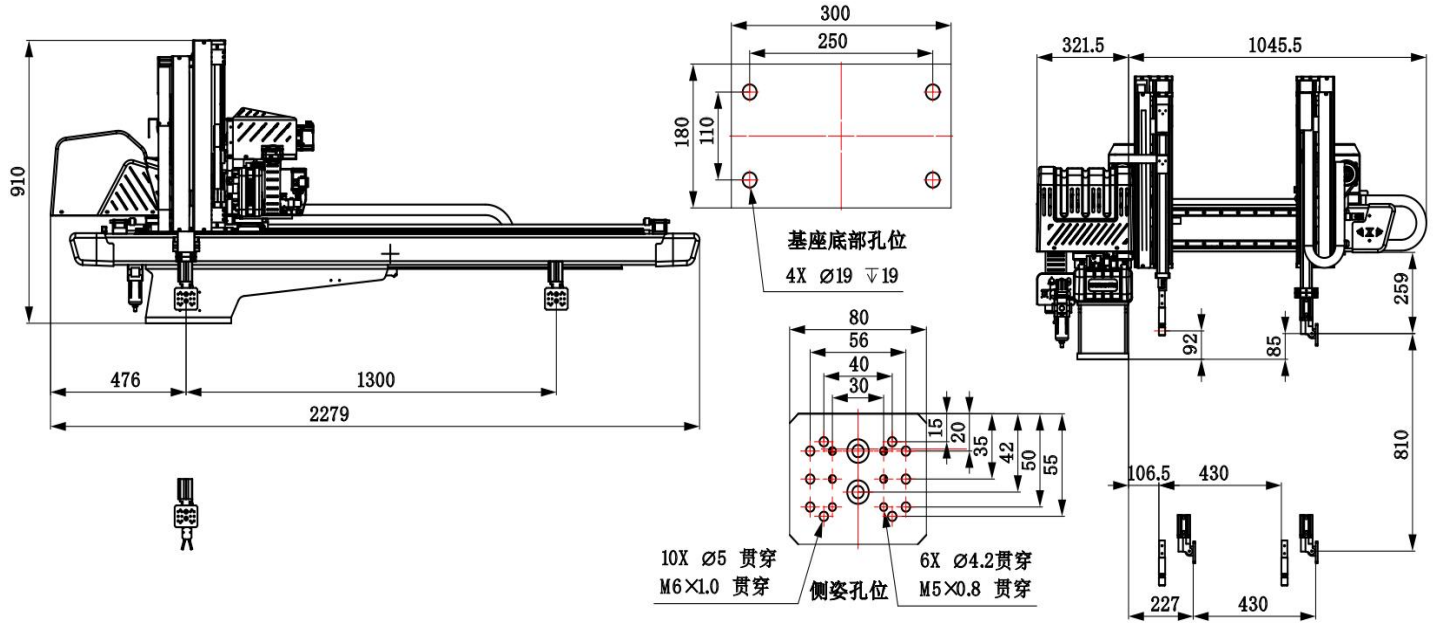

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.