
BRTR11WDS5FC technical specifications

Power sourse (Kva)	Power Supply (V)	Recommended IMM (T)	Drive method	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(kg)
4.6	220	320-470	AC servo motor	1700	P:750 R:750	1100	P:165 R:176	10	7.2	2.49	Double arm and telescopic type	four suctions two fixtures	90 °	0.5-0.6	4	±0.05	2342*1564*1426.5	255

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
1000W	750W 1：9	25mm	Belt: 25mm	400W*2	400W*2 1:9	20mm	Gear: 20mm	/	1000W	750W 1：9	25mm 20mm	Belt: 15mm 25mm	/	750W	750W 1:5	20mm 20mm	Belt: 15mm 25mm	/

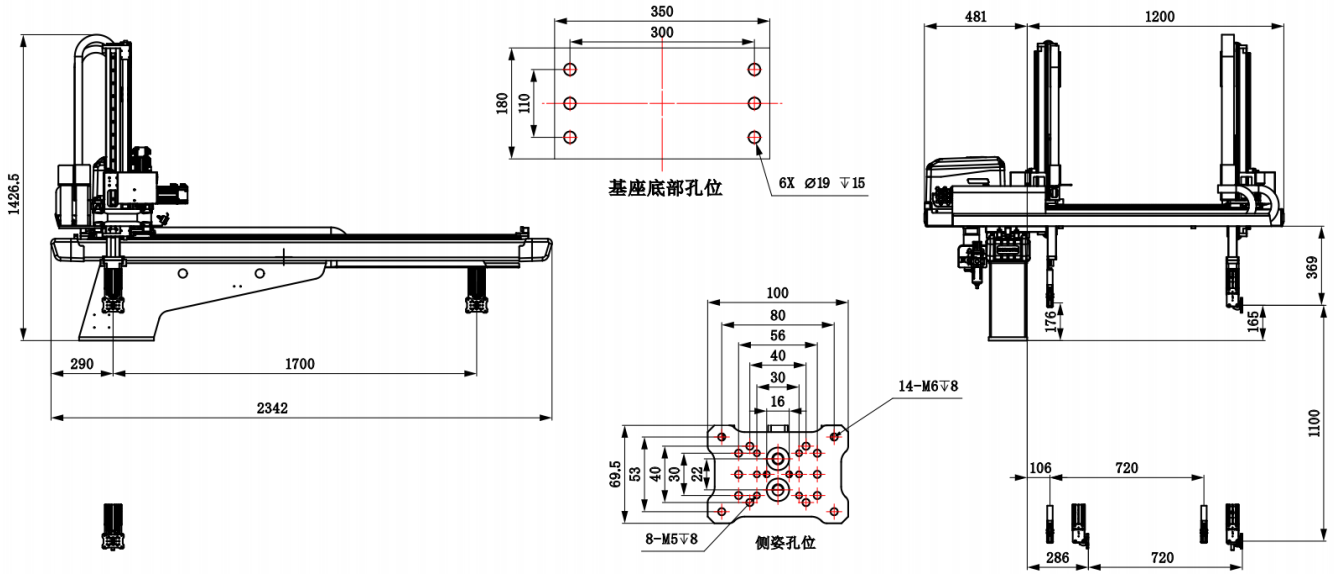

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.