
BRTV09WDS5P0 technical specifications

Power sourse (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke(mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (Mpa)	Air consumption (N- l /cycle)	Positiong accuracy (mm)	Complete machine size (mm)	Net weight(Kg)
3.4	220	120-320	AC servo motor	Traverse total arch length:6m	pending	900	P: 174 R: 187	5	pending	1.7	Double arms and telescopic type	Two suctions two fixtures	90°	0.5-0.6	9	±0.05	pending	pending

transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack /Belt	Air cylinder
750W	750W 1：9	25mm	2 modules	400W*2	400W*2 1:9	20mm	1.5 modules	/	750W	750W 1：9	20mm	Belt: 15mm 20mm	/	750W	750W 1:9	20mm	belt: 15mm 20mm	/

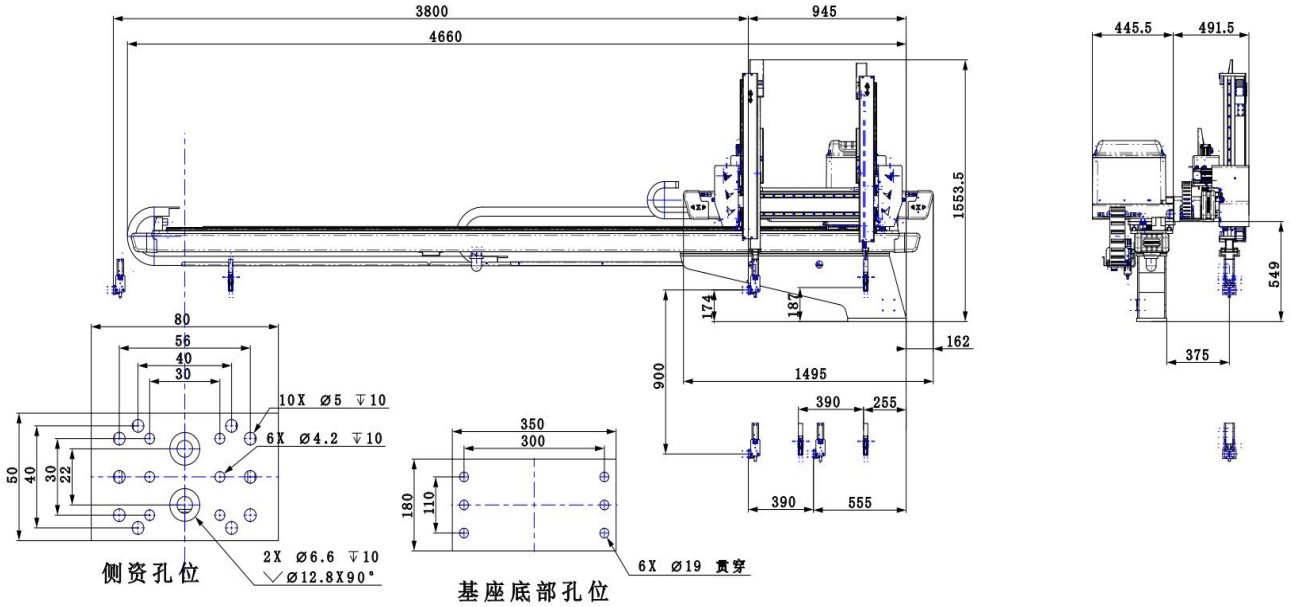

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.